



DELCO
TRAILERS

DUMPS // EQUIPMENT & CAR HAULERS // DECKOVERS // EQUIPMENT TILTS // UTILITIES // BAR TOPS
METAL TOPS // PREMIUMS // BUMPER STOCKS // BUMPER HORSE // ENCLOSED CARGOS // GROUNDLOADS



4131 CR 35500,
SUMNER, TX 75486



(903) 739-9400




DELCOTRAILERS.COM



ABOUT US

Since 2006, Delco Trailers has been a family owned and operated company founded on the principles of quality, craftsmanship and customer satisfaction. We focus on quality design with the highest possible standards. Delco Trailers provides a wide variety of steel trailers for those who are looking for professional performance. Our constantly growing lineup of trailers includes stock, cargo, flatbed, dumps, and utility trailers. We provide custom options, so the trailer can be built to your specifications and needs. We are committed to delivering a trailer that you can depend on every single day. We pride ourselves in providing exceptional customer service and delivering products of the highest caliber.

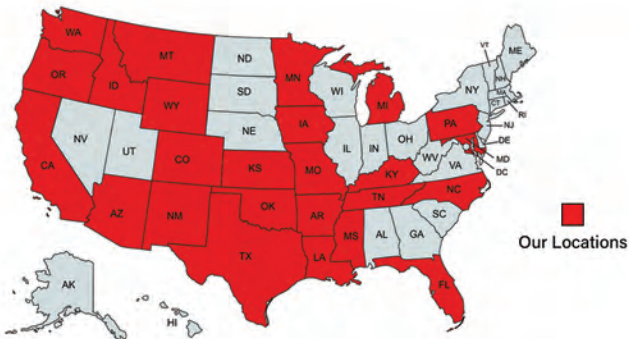

DELCO DEALER NETWORK

With over 100 dealer locations, and we are constantly growing our dealer network to better accommodate your ever growing needs. To find a dealer near you go to our website dealer locator <https://www.delcotrailers.com/dealer-locator/>

FOUNDED ON THE PRINCIPLES OF QUALITY, CRAFTSMANSHIP & CUSTOMER SATISFACTION

FULL RANGE OF STEEL TRAILERS

Delco Trailers is here to help you create the perfect steel trailer that meets your needs, and we can gladly say our steel trailers will surpass all expectations! At Delco Trailers, we engineer our trailers to be the strongest, safest, and most durable steel trailers around. At Delco Trailers, our steel trailers provide reliable and dependable performance at all times.

COMMITMENT TO CUSTOMER SATISFACTION

Our expert team has years of experience providing top-notch customer service. We are committed to delivering a trailer that you can depend on, every single day. We're here when you need us. Our customer service team will work with you to find a trailer suited to your needs. This commitment to customer care and quality workmanship has made Delco Trailers the leading brand in its market, and that means you get only the best when you choose Delco Trailers!

FAMILY NETWORK

We're proud to be part of such an innovative industry and take great pride in our dealer network. Our dealers are like our extended family—they're the face of Delco Trailers, and they're the ones who meet amazing people like you and make it all possible in making you a part of our family. With over 100 Delco trailer dealers throughout the United States, we're able to provide the quick response times and knowledgeable staff that you need for any trailer request.





BUILT FOR **MULTIPLE USES**

Delco dump trailers are built tough and proven to work hard for you. Whether you're just launching a landscaping business or are looking for ways to grow your construction company, our dependable dump trailer can help take on a number of projects on the job. Our line-up is designed to haul an array of cargo, including construction debris, scrap metal, dirt and gravel.

DUMP

D1 7K BUMPER PULL 60" WIDE DUMP



GVWR:	7,000 LBS
FRAME:	6" C-CHANNEL FRAME & 6" I-BEAM TONGUE
AXLE:	2 - 3.5K & 1-7K LBS. AXLES
LENGTH:	8-10'
SIDE HEIGHT:	18"
INSIDE WIDTH:	60"
BED HEIGHT:	26"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	225/75R15 TIRES

D2 12K BUMPER PULL 72" WIDE DUMP



GVWR:	12,000 LBS
FRAME:	8" I-BEAM FRAME AND TONGUE
AXLE:	2 - 6K LBS. AXLES
LENGTH:	12'
SIDE HEIGHT:	21"
INSIDE WIDTH:	72"
BED HEIGHT:	28"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

D3 14K BUMPER PULL 83" WIDE DUMP



GVWR:	14,000 LBS
FRAME:	8" I-BEAM FRAME AND TONGUE
AXLE:	2-7K AXLES
LENGTH:	12-16'
SIDE HEIGHTS:	24", 36", AND 48"
INSIDE WIDTH:	83"
BED HEIGHT:	24-28"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

D4 14K GOOSENECK 83" WIDE DUMP



GVWR:	14,000 LBS
FRAME:	8" I-BEAM FRAME & 10" I-BEAM NECK
AXLE:	2-7K LBS. AXLES
LENGTH:	12-16'
SIDE HEIGHTS:	24", 36", AND 48"
INSIDE WIDTH:	83"
BED HEIGHT:	24-28"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

D5 16K BUMPER PULL 83" WIDE DUMP



GVWR:	16,000 LBS
FRAME:	8" I-BEAM FRAME AND TONGUE
AXLE:	2-8K LBS. AXLES
LENGTH:	12-16'
SIDE HEIGHTS:	24", 36", AND 48"
INSIDE WIDTH:	83"
BED HEIGHT:	24-28"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/85R16 RADIAL TIRES

D6 16K GOOSENECK 83" WIDE DUMP



GVWR:	16,000 LBS
FRAME:	8" I-BEAM FRAME & 10" I-BEAM NECK
AXLE:	2-8K LBS. AXLES
LENGTH:	12-16'
SIDE HEIGHTS:	24", 36", AND 48"
INSIDE WIDTH:	83"
BED HEIGHT:	24-28"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/85R16 RADIAL TIRES

EQUIPMENT AND CAR HAULERS

BUILT FOR DEPENDABILITY

Each style is available in several sizes with an array of options for the perfect match. The thoughtful design with smart features offers convenience, efficiency, and years of durable service. This trailer also can be ideal for hauling classic or vintage cars that you want to keep in the utmost condition. You can rely on their strength and durability to meet the demands of safely and securely hauling your vehicle or equipment.



C1

83" WIDE 12K EQUIPMENT (BUMPER PULL)



GVWR:	12,000 LBS
FRAME:	6" C-CHANNEL FRAME AND TONGUE
AXLE:	2-6K LBS. AXLE
LENGTH:	16-24'
DECK HEIGHT:	25"
DECK WIDTH:	83"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

C2

102" WIDE 12K EQUIPMENT (BUMPER PULL)



GVWR:	12,000 LBS
FRAME:	6" I-BEAM INNER FRAME & 6" C-CHANNEL OUTER FRAME AND TONGUE
AXLE:	2-6K LBS. AXLE
LENGTH:	16 - 22'
DECK HEIGHT:	26"
DECK WIDTH:	102"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

EQUIPMENT AND CAR HAULERS

C3

83" WIDE 7K EQUIPMENT (BUMPER PULL) (PAINTED)



GVWR:	7,000 LBS
FRAME:	4" C-CHANNEL FRAME AND TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	12-20'
DECK HEIGHT:	21"
DECK WIDTH:	83"
COUPLERS:	2' A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

C6

83" WIDE 14K/16K EQUIPMENT (BUMPER PULL)



GVWR:	14,000 - 16,000 LBS
FRAME:	6" C-CHANNEL FRAME AND TONGUE
AXLE:	2-7 & 2-8K LBS. AXLES
LENGTH:	16-24'
DECK HEIGHT:	27"
DECK WIDTH:	83"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

C7

102" WIDE 14K/16K EQUIPMENT (BUMPER PULL)



GVWR:	14,000 - 16,000 LBS
FRAME:	6" I-BEAM INNER FRAME & 6" C-CHANNEL OUTER FRAME AND TONGUE
AXLE:	2-7 & 2-8K LBS. AXLES
LENGTH:	16-24'
DECK HEIGHT:	26"
DECK WIDTH:	102"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

C8

83" WIDE 14K/16K EQUIPMENT (GOOSENECK)



GVWR:	14,000 - 24,000 LBS
FRAME:	8" C-CHANNEL FRAME & 10" I-BEAM NECK ON 26' AND UNDER, 10" C-CHANNEL FRAME & 12" I-BEAM NECK ON 28' AND LONGER
AXLE:	2-7 & 2-8K LBS. AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. AXLES ON 28' AND LONGER
LENGTH:	20 - 40'
DECK HEIGHT:	28"
DECK WIDTH:	83"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

C9

102" WIDE 14K/16K EQUIPMENT (GOOSENECK)



GVWR:	14,000 - 24,000 LBS
FRAME:	8" I-BEAM FRAME & 10" I-BEAM NECK ON 26' AND UNDER, 10" I-BEAM FRAME & 12" I-BEAM ON 28' AND LONGER
AXLE:	2-7 & 2-8K LBS. AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. AXLES ON 28' AND LONGER
LENGTH:	20 - 40'
DECK HEIGHT:	28"
DECK WIDTH:	102"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

CB

8" I-BEAM EQUIPMENT (BUMPER PULL)



GVWR:	14,000-16,000 LBS
FRAME:	8' I-BEAM FRAME AND TONGUE
AXLE:	2-7 & 2-8K LBS. AXLES
LENGTH:	18-24'
DECK HEIGHT:	27"
DECK WIDTH:	83"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES



BUILT FOR **VERSATILITY**

Ranging from 16 to 44 feet, Delco deckovers offer some of the most versatile and heavy duty trailers in our lineup. The deck on these models is constructed over the wheels, maximizing load surface and strength. These are available in gooseneck, bumper pull, or pin-tle-hook and in various axle configurations with hauling capacities ranging from 12,000 to 30,000 pounds.



DECKOVER

F1
14K DECKOVER GOOSENECK


GVWR:	14,000 - 24,000 LBS
FRAME:	12" 14# I-BEAM FRAME & NECK
AXLE:	2-7 & 2-8K LBS. AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. AXLES ON 28' AND LONGER
LENGTH:	20-40'
DECK HEIGHT:	33"
DECK WIDTH:	102"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

FD
20K/24K DECKOVER GOOSENECK


GVWR:	22,990 - 25,990 LBS
FRAME:	12" 19# I-BEAM FRAME & NECK
AXLE:	2-10K & 2-12K AXLES
LENGTH:	20-44'
DECK HEIGHT:	33"
DECK WIDTH:	102"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

F5
30K DECKOVER GOOSENECK


GVWR:	30,000 LBS
FRAME:	12" 22# I-BEAM FRAME & NECK
AXLE:	2-15K AXLES
LENGTH:	20-44'
DECK HEIGHT:	33"
DECK WIDTH:	102"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	215/75R17.5 RADIAL TIRES

FH
20K/24K HYDRAULIC DOVE-TAIL


GVWR:	22,990 - 25,990 LBS
FRAME:	12" 19# I-BEAM FRAME & NECK
AXLE:	2-10K & 2-12K AXLES
LENGTH:	26-44'
DECK HEIGHT:	33"
DECK WIDTH:	102"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

F6
12/14K BUMPER PULL DECKOVER (LIGHT DUTY)


GVWR:	12,000 -14,000 LBS
FRAME:	6' C-CHANNEL FRAME AND TONGUE
AXLE:	2-6 & 2-7K LBS. AXLES
LENGTH:	16-24'
DECK HEIGHT:	33"
DECK WIDTH:	102"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

F8
14/16K BUMPULL DECKOVER


GVWR:	14,000 -16,000 LBS
FRAME:	8" I-BEAM INNER FRAME & TONGUE
AXLE:	2-7K & 2-8K LBS. AXLES
LENGTH:	18-24'
DECK HEIGHT:	33"
DECK WIDTH:	102"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

EQUIPMENT TILTS

D



BUILT FOR EFFICIENCY

Tilt trailers are designed to make quick work of loading and unloading cargo and powered equipment. With our custom design tilt you will have no issue with your equipment. Whether classic cars or light-duty work equipment, tilt trailers are an ideal solution for your hauling needs.

T2

14/16K BUMPER PULL EQUIPMENT TILT



GVWR:	14,000 - 16,000 LBS
FRAME:	2"X6" TUBING FRAME AND TONGUE
AXLE:	2-7 & 2-8K LBS. AXLES
TILT OPTION:	16' GRAVITY OR POWER UP/DOWN DECK
LENGTH:	16 - 24'
DECK HEIGHT:	21"
DECK WIDTH:	83" & 102"
COUPLERS:	ADJUSTABLE 2 5/16"
TIRES:	235/80R16 RADIAL TIRES

T4

14/16K GOOSENECK EQUIPMENT TILT



GVWR:	14,000 - 16,000 LBS
FRAME:	2"X6" TUBING FRAME AND 10" I-BEAM NECK
AXLE:	2-7 & 2-8K LBS. AXLES
TILT OPTION:	16' GRAVITY OR POWER UP/DOWN DECK
LENGTH:	16 - 24'
DECK HEIGHT:	21"
DECK WIDTH:	83" & 102"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

PIPE HAULER & ROLL-OFF

PH

14K PIPE HAULER



GVWR:	14,000 LBS
FRAME:	12" 14# I-BEAM FRAME & NECK
AXLE:	2-7K LBS. AXLE
LENGTH:	32-40'
DECK HEIGHT:	36"
COUPLERS:	ADJUSTABLE 2 5/16 AND GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

U9

14K ROLL-OFF DUMP



GVWR:	14,000 - 16,000 LBS
FRAME:	8" I-BEAM FRAME & 10" I-BEAM NECK
AXLE:	2-7K LBS. & 2-8K LBS. AXLES
BIN LENGTH:	12' - 16'
BIN HEIGHT:	4' & 6"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES



BUILT FOR FUNCTION

Our roll off dump trailers allow you to have multiple bins for multiple locations. If you need two or more dump trailers then a roll off trailer is a more cost effective solution in most cases.

Our pipe hauler is the optimal way to haul pipe out in the field. This trailer gives you the power to carry almost any length of PVC, aluminum, or whatever light-to-medium grade pipe you're hauling.



BUILT FOR EVERYDAY

Landscape and Utility Trailers offer versatility to haul for work or play. Customizing your utility trailer is a great way to get the perfect set-up for whatever you need to haul. Equipment racks to hold lawn equipment, lockable storage compartments, spring assists ramps, upgrades to the trailer floor, new utility trailer walls—the sky is the limit with all the different ways you can outfit a utility trailer to perfectly meet your needs.

U1

60" WIDE SINGLE AXLE UTILITY (ANGLE FRAME)



GVWR:	3,500 LBS
FRAME:	2"X3"X3/16" ANGLE FRAME AND 4" CHANNEL TONGUE
AXLE:	1-3.5K LBS. AXLE
LENGTH:	8-14'
DECK HEIGHT:	21"
DECK WIDTH:	60"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U2

77" WIDE SINGLE AXLE UTILITY (ANGLE FRAME)



GVWR:	3,500 LBS
FRAME:	2"X3"X3/16" ANGLE FRAME AND 4" CHANNEL TONGUE
AXLE:	1-3.5K LBS. AXLE
LENGTH:	8-14'
DECK HEIGHT:	21"
DECK WIDTH:	77"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U3

83" WIDE SINGLE AXLE UTILITY (ANGLE FRAME)



GVWR:	3,500 LBS
FRAME:	2"X3"X3/16" ANGLE FRAME & 4" CHANNEL TONGUE
AXLE:	1-3.5K LBS. AXLE
LENGTH:	10-14'
DECK HEIGHT:	21"
DECK WIDTH:	83"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

UTILITY

U4

60" WIDE TANDEM UTILITY (ANGLE FRAME)



GVWR:	7,000 LBS
FRAME:	2"X3"X3/16" ANGLE FRAME AND 4" CHANNEL TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	10-14'
DECK HEIGHT:	21"
DECK WIDTH:	60"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U5

77" WIDE TANDEM UTILITY (ANGLE FRAME)



GVWR:	7,000 LBS
FRAME:	2"X3"X3/16" ANGLE FRAME AND 4" CHANNEL TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	10-18'
DECK HEIGHT:	21"
DECK WIDTH:	77"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U6

83" WIDE TANDEM UTILITY (ANGLE FRAME)



GVWR:	7,000 LBS
FRAME:	2"X3"X3/16" ANGLE FRAME & 4" CHANNEL TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	10-20'
DECK HEIGHT:	21"
DECK WIDTH:	83"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U7

60" WIDE TANDEM UTILITY (4" CHANNEL FRAME)



GVWR:	7,000 LBS
FRAME:	4" CHANNEL FRAME AND TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	10-14'
DECK HEIGHT:	21"
DECK WIDTH:	60"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U8

77" WIDE TANDEM UTILITY (4" CHANNEL FRAME)



GVWR:	7,000 LBS
FRAME:	4" CHANNEL FRAME AND TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	10-20'
DECK HEIGHT:	21"
DECK WIDTH:	77"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

U9

83" WIDE TANDEM UTILITY (4" CHANNEL FRAME)



GVWR:	7,000 LBS
FRAME:	4" CHANNEL FRAME AND TONGUE
AXLE:	2-3.5K LBS. AXLE
LENGTH:	10-22'
DECK HEIGHT:	21"
DECK WIDTH:	83"
COUPLERS:	2" A-FRAME COUPLER
TIRES:	205/75R15 RADIAL TIRES

GOOSENECK STOCK/HORSE



BUILT FOR **TRANSPORT**

Ranked #1 in the nation by *StatisticalSurvey* for our stock trailer sales, we offer a range of gooseneck or bumper pull livestock & horse trailers. These trailers are designed to haul any type of livestock.

B
BAR TOP


GVWR:	14,000 - 24,000 LBS
FRAME:	10 GAUGE FENDER & 3X5" X 3/16" ANGLE IRON FRAME
AXLE:	2-7 & 2-8K LBS. TORSION AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. TORSION AXLES ON 28' AND LONGER
LENGTH:	14 - 40'
INTERIOR HEIGHT:	6'6"
WIDTH:	6', 6'8", 7', 7'6"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

M
METAL TOP


GVWR:	14,000 - 24,000 LBS
FRAME:	10 GAUGE FENDER & 3X5" X 3/16" ANGLE IRON FRAME
AXLE:	2-7 & 2-8K LBS. TORSION AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. TORSION AXLES ON 28' AND LONGER
LENGTH:	14 - 40'
INTERIOR HEIGHT:	6'6"
WIDTH:	6', 6'8", 7', 7'6"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

P
PREMIUM


GVWR:	14,000 - 24,000 LBS
FRAME:	10 GAUGE FENDER & 3X5" X 3/16" ANGLE IRON FRAME
AXLE:	2-7 & 2-8K LBS. TORSION AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. TORSION AXLES ON 28' AND LONGER
LENGTH:	14 - 40'
INTERIOR HEIGHT:	6'6"
WIDTH:	5', 6', 6'8", 7', 7'6"
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES

BUMPER PULL STOCK/HORSE



S

BUMPER STOCK



GVWR:	7,000 - 12,000 LBS
FRAME:	16 GAUGE SHEET METAL SIDES W/ 1X2" TUBING UPRIGHTS
AXLE:	2-3.5 & 2-6K LBS. TORSION AXLES
INTERIOR HEIGHT:	6'6"
WIDTH:	6', 6'8"
COUPLERS:	ADJUSTABLE 2 5/16
TIRES:	235/80R16 RADIAL TIRES

H

BUMPER HORSE



GVWR:	7,000 - 12,000 LBS
FRAME:	16 GAUGE SHEET METAL SIDES W/ 1X2" TUBING UPRIGHTS
AXLE:	2-3.5 & 2-6K LBS. TORSION AXLES
INTERIOR HEIGHT:	6'6"
WIDTH:	6', 6'8"
COUPLERS:	ADJUSTABLE 2 5/16
TIRES:	235/80R16 RADIAL TIRES

ENCLOSED CARGO



CARGO



GVWR:	7,000 - 14,000 LBS
FRAME:	10 GAUGE FENDER & 3X5" X 3/16" ANGLE IRON FRAME
AXLE:	2-7 & 2-8K LBS. TORSION AXLES ON 26' AND UNDER, 3-7 & 3-8K LBS. TORSION AXLES ON 28' AND LONGER 2-3.5K & 2-6K & 2-7K LBS. TORSION AXLES
INTERIOR HEIGHT:	6'6"
WIDTH:	6', 6'8", 8'
COUPLERS:	ADJUSTABLE 2 5/16
TIRES:	235/80R16 RADIAL TIRES

BUILT FOR PROTECTION

Our enclosed cargo trailers have many uses. They are made water tight so that you can trust your equipment is always protected. Whenever you're transporting or storing items, there's nothing more important than security. With the right options, our cargo trailers have the capability to lock contents safely away inside. These are all steel heavy duty cargos made with tongue and groove boards.



GROUNDLOAD

GB

GOOSENECK GROUNDLOAD



GVWR:	20,000 - 24,000 LBS
FRAME:	10 GAUGE FENDER & 3X5" X 3/16" ANGLE IRON FRAME
AXLE:	2-10 & 2-12K LBS. DUAL TANDEM
LENGTH:	32-40'
INTERIOR HEIGHT:	6'6"
WIDTH:	7'6"
TOP	BAR TOP & METAL TOP
COUPLERS:	GOOSENECK 25K 2 5/16" ROUND
TIRES:	235/80R16 RADIAL TIRES



BUILT FOR **PERFORMANCE**

The dual tandem Delco Groundload is built with a rear step deck making it easy to load and unload large quantities of livestock.





MANUFACTURER'S LIMITED WARRANTY

Delco Trailers, LLC warrants that its product, operated by the original purchaser under normal use and service, to be free from defects in material and workmanship for a period of 1-year from date of original sale subject to requirements, exclusions, and limitations stated below.



WARRANTY COVERS

This 1-year Limited Warranty on Stock and Cargo Trailers and 2-year Limited Warranty on Utility, Flatbeds, and Dumps covers the structure portion of the trailer. Which includes the frame, consisting of fenders, crossmembers, side post, exterior walls, roof of rails, bows, and the sub frame. Furthermore, Delco Trailers, LLC warrants its paint application to be consistent with industry standards for 1-year after date of original purchase, with the exception of normal wear conditions and deterioration due to factors such as chipping, scratching, fading, cracks in caulk seams, road salt or tar, damage by animals or pressure washers.



WARRANTY EXCLUSIONS

Tires, axles, brake components, springs and suspension components, couplers, jacks, castors, mats, batteries, windows, doors, and any other auxiliary parts purchased and installed by Delco Trailers, LLC are warranted by their manufacturer and are not included in this Limited Warranty.



WARRANTY VOID

This Limited Warranty covers only defects in original components due to normal use and will be void if product is subject to accident, misuse, negligence, tampering, overloading, improper attachment or improper maintenance. Normal wear items including but not limited to, flooring, paint, brake linings and bearings will not be replaced due to wear. Loading in excess of gross vehicle load ratings stated on the certificate will invalidate all warranties. This Limited Warranty excludes any and all liability for consequential or incidental damages. This Warranty does not cover a product which has been repaired, altered, or tampered with outside of the factory



LIMITATIONS

The sole responsibility of Delco Trailers, LLC under this Limited Warranty shall be to repair and replace parts at the Delco Trailers, LLC factory, an authorized Delco Trailers, LLC dealer, or another location with prior approval by Delco Trailers, LLC. Any repairs performed at a location other than Delco Trailers, LLC will be granted \$65.00 per hour for labor costs. Delco Trailers, LLC holds the right to refuse excessive charges for labor costs. Transportation of any trailer to and from your Dealer or an approved repair facility shall be the responsibility of the trailer owner. All other obligations or liabilities including incidental or consequential damages, or contingent liabilities arising out of the failure of any parts to operate properly are hereby excluded, including but not limited to any damages resulting from loss of use, inconvenience, loss of time, commercial loss or any type of damages, general or specific, foreseen or unforeseen, unless applicable state law provides otherwise.



DISCLAIMERS

This Limited Warranty is expressly in lieu of all other warranties and representations. Delco Trailers, LLC makes no representation or warranty of any kind, express or implied, with respect to Delco Trailers, LLC whether as to merchantability, fitness for a particular purpose or any other matter. No one, including an authorized Delco Trailers, LLC dealer, is authorized to make further or additional warranties on behalf of Delco Trailers, LLC. All implied warranties of merchantability and fitness for intended use are limited to warranty periods stated above unless any applicable state law provides otherwise.



WARRANTY ACCEPTANCE

Upon the purchase of a Delco Trailers, LLC trailer, the purchaser agrees to the manufacturer's Limited Warranty, which is accompanied with the purchase of a new trailer. The purchaser agrees that he/she has been informed of the Limited Warranty and claim procedures and will perform all responsibilities under this Limited Warranty.



WARRANTY CLAIM PROCEDURE

1. Within (5) days after discovering a problem with your Delco Trailers, LLC trailer, return the trailer for inspection to the Delco Trailers, LLC dealer from where the trailer was purchased.
2. If your dealer cannot repair the problem free of charge and you want to file a claim under this Warranty, your local dealer must send to Delco Trailers, LLC a letter either faxed or mailed with all the required information, within (10) days of discovery of the defect.
3. Delco Trailers, LLC will acknowledge such receipt of claim by fax, phone or email to the dealer and to the claimant and will respond as soon as possible, but no later than (30) days after the receiving the claim.
4. Any defective part(s) must be sent by prepaid freight to Delco Trailers, LLC. In order to qualify the claimant for the replacement or reimbursement under this limited warranty, any defective parts must be returned to Delco Trailers, LLC within (30) days from date of approval to qualify for reimbursement.
5. Delco Trailers, LLC will not reimburse any claimant for any adjustment or repair of a Delco Trailers, LLC trailer without written approval by Delco Trailers.
6. Delco Trailers, LLC reserves the right to not pay unreasonable cost for replacement or repair of defects in Delco Trailers, LLC trailers and may, at its discretion, establish reasonable reimbursement for any authorized work performed under the terms of this Limited Warranty.
7. When required, photos of defective part(s) or the actual part(s) may have to accompany the warranty approval before payment can or will be made.
8. Delco Trailers, LLC makes no other express or implied warranties and there are no other warranties which extend beyond the description on the face of this limited warranty.

Warning: Do not modify Delco Trailers products. Install only on specified vehicles in good condition. Delco Trailers towing products are designed to tow trailers. Use only for this purpose. Do not attach cargo carriers, motorcycle carriers, boat hoists, or coupler alignment devices. Do not extend the original structure. Do not use to pull or push the towing vehicle. Do not use as a jacking point. Do not attach anything with or in place of the ball. Do not tow multiple trailers. Towing one trailer behind another may cause severe instability and loss of control. Failure to heed warning and follow instructions may result in vehicle crash, property damage and personal injury. Do not overload any part of your towing system. Proper and regular trailer maintenance will help insure longer use. To help you with your maintenance, we suggest the following:

1. Use correct ball size for your trailer hitch
2. Lug nuts should be torqued regularly
3. Proper tire pressure should always be maintained
4. Wheel bearing should be checked at least once a year
5. Check all electrical connections regularly
6. Check upon each hook up that all lights are operational
7. Brakes should be checked and adjusted at least once a year
8. Maintain proper fluid levels
9. Load on trailer should be evenly distributed
10. Your trailer should be inspected and serviced regularly for optimal life of trailer for inquiries or comments, please contact:

Delco Trailers, LLC
4131 CR 35500 Sumner, TX 75486
(903)739-9400



DELCO TRAILERS



4131 CR 35500, SUMNER, TX 75486



(903) 739-9400



DELCOTRAILERS.COM